

The Rhino® SE8A AND SE10A are economical rotary mowers designed to help maintain larger acreages of grass, weeds, stalks, or material up to 1" in diameter.

SE8A SE10A



Unit Shown With Optional Chain Guards (Deflectors are Standard)

The streamlined, close-coupled design allows economical operation on tractors as small as 30 horsepower on the SE8A and 45 horsepower on the SE10A. The 100 HP center gearbox and 70 HP outboard gearboxes have enhanced protection from a slip clutch on the main driveline and torque dampeners on the side driveshafts. Pan blade carriers help the unit glide over field obstacles and updraft blades with a 4" blade overlap provide a clean cut. The SE8A is available as a 540 RPM unit with either a CAT II lift, semi-mount, or clevis pull-type hitch to fit a range of tractors. The SE10A is available with either a heavy-duty CAT II-III Q.H., semi-mount, or pull-type hitch for 540 RPM tractors. The 10 gauge deck is reinforced front-to-rear and side-to-side for optimum strength. The Cat 4 main driveline and all gearboxes are fully-shielded for greater operator safety. Front and rear safety deflectors are standard equipment to help reduce the risk of damage or injury due to thrown objects. Front and rear chain guards are optional equipment.

Compare and you will see why the Rhino SE8A and SE10A are excellent choices for economical wide-cut mowers.





SE8A Lift-Type

The lift-type SE8A features a CAT II hitch and is designed for use on 540 RPM tractors as small as 45 HP (with adequate front weights). Designed to mow a 94" swath, updraft blades and a 4" blade overlap help ensure a clean cut. The 10 gauge deck and 8-1/2" side skirts are reinforced to help provide dependable mainframe strength.

The pull-type SE8A requires only a 30 HP tractor (min.) for economical operation. An adjustable control rod maintains the proper adjustment front-to-rear for a smooth cut. Laminated tailwheels with greaseable tapered roller bearings are standard equipment.



SE8A Pull-Type

**Five-Year Limited
Gearbox Warranty**



SE10A Lift-Type

The SE10A mows a 118" swath and is available as a 540 or 1000 RPM unit. The lift-type features a rugged CAT II-III Q.H. for easier unit "hook-up." The lift-type can be operated on 55 HP (min.) tractors (with adequate front weights). The side skirts are 9-1/2" deep to help handle large volumes of material and along with the 10 gauge deck are reinforced to provide trouble-free performance.

Unit Shown With Optional Chain Guards (Deflectors are Standard)




SE10A Pull-Type

The pull-type SE10A requires only a 45 HP (min.) tractor for economical, wide-cut mowing. A hydraulic cylinder or ratchet lift screw is available for raising and lowering the mower. A spring shock absorber is optional to help cushion shockloads to the mainframe when operating in rough terrain. (Unit shown with optional chain guards. Deflectors are standard.)



SIDE SKIRTS AND SKID SHOES: Replaceable skid shoes are standard equipment to help reduce wear on the side skirts. All gearboxes and drivelines are fully shielded for greater safety. Front and rear rubber safety deflectors are standard. Chain guards are optional equipment.

GEARBOXES AND DRIVELINES: THE 100 HP center gearbox and 70 HP outboard gearboxes have enhanced protection from a slip clutch on the main driveline and torque dampeners on both side driveshafts. The 10 gauge deck is braced front-to-rear and side-to-side for optimum strength. The deck design allows for easy unit clean-off. (Shield removed to show detail.)

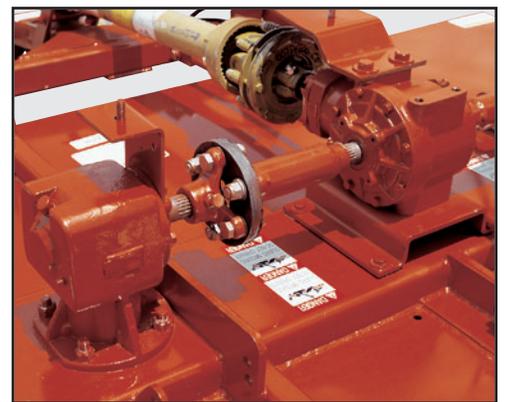

TAILWHEEL ASSEMBLY: Lift-type units feature laminated tailwheels for dependable service. Greaseable tapered roller wheel bearings and caster forks are standard for long service life. The tailwheels can be easily adjusted to different mowing heights to help provide the desired cut in your specific application.



STANDARD EQUIPMENT AND SPECIFICATIONS

	SE8A	SE10A
Cutting Width	94"	118"
Overall Width	99-3/8"	124-3/8"
Overall Length	103"	116"
Cutting Height	1-1/4"-12"	1-1/4"-12"
Jack Stand	Std. (Pull)	Std. (Pull)
Hitch	CAT II Lift, Semi-Mount, or Pull	CAT II-III Q.H., Semi-Mount, or Pull
Blade Carriers	Pan	Pan
Blades	.401" x 3", Updraft	.401" x 3", Updraft
Blade Overlap	4"	4"
PTO Horsepower Required (Min.)		
Lift	45 HP	55 HP
Semi-Mount	40 HP	50 HP
Pull	30 HP	45 HP
Gearbox Rating:		
Center	100 HP	100 HP
Outboard	70 HP	70 HP
Output Shaft Diameter	2"	2"
Blade Tip Speed: (540 RPM)	12,666 FPM	15,771 FPM
Cutting Capacity (Max.)	1"	1"
Driveline Size	Cat 4	Cat 4
Driveline Protection	Slip Clutch	Slip Clutch
Deck Thickness	10 Ga.	10 Ga.
Side Skirt	10 Ga. x 8-1/2"	10 Ga. x 9-1/2"
Safety Tow Chain	Std. (Pull)	Std. (Pull)
Safety Deflectors	Rubber Belting	Rubber Belting
Weight (Approx.)	1295 lbs.	1759 lbs.

EXTRA EQUIPMENT

Check Chains
 Spring Shock Absorber (Pull-Type)
 CAT I Pins (SE8A Lift-Type)
 Auxiliary Spindle Kit (SE10A Pull-Type)

OPTIONAL EQUIPMENT

Front and Rear Chain Guards
 Lift, Semi-Mount, or Pull-Type Hitch
 Foam-Filled Used Airplane Tire & Wheel, Laminated, Used Airplane Tire & Wheel, 15" Wheel, or Implement Tire & Wheel (SE10A Pull-Type)
 Ratchet Lift Screw or Hydraulic Cylinder (Semi-Mount or Pull-Type)

www.servis-rhino.com

RHINO® guarantees each piece of Rhino equipment against defective materials and workmanship for a period of one year from the date of delivery to the purchaser unless otherwise specified.

RHINO® reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.

Servis & Rhino are registered trademarks of Alamo Group Inc.



SE8A & SE10A 10/09 OSP
 Printed in USA



A member of Alamo Group
 1020 South Sangamon Ave., Gibson City, IL 60936
 Phone: 877-408-3297 Fax: 877-408-3298